

Customer No. 20350
TOWNSEND and TOWNSEND and CREW LLP
Two Embarcadero Center, 8th Floor
San Francisco, California 94111-3834
(415) 326-2400

ASSISTANT COMMISSIONER FOR PATENTS
BOX PATENT APPLICATION
Washington, D.C. 20231

Attorney Docket No. 17018-12.10US

"Express Mail" Label No. EL524032770US

Date of Deposit: March 20, 2000

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above, addressed to:

Assistant Commissioner for Patents
Washington, D.C. 20231

By:

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is the

- ☐ [X] patent application of
☐ [] continuation patent application of
☐ [] divisional patent application of
☐ [] continuation-in-part patent application of

Inventor(s)/Applicant Identifier: Mark J. Miller, Mark D. Dankberg, and Charles N. Pateros

For: METHOD AND APPARATUS FOR MULTIPLE ACCESS OVER A COMMUNICATION CHANNEL

- ☒ This application claims priority from each of the following Application Nos./filing dates:
60/148,925, August 13, 1999
-
- ☐ the disclosure(s) of which is (are) incorporated by reference.
- ☐ Please amend this application by adding the following before the first sentence: "This application is a ☐ continuation ☐ continuation-in-part of and claims the benefit of U.S. Application No. 60/_____, filed _____, the disclosure of which is incorporated by reference."

Enclosed are:

- ☒ 13 page(s) of specification
☒ 1 page(s) of Title Sheet
☒ 11 page(s) of claims
☒ 1 page of Abstract
☒ 4 sheet(s) of ☒ formal ☐ informal drawing(s)
☒ An assignment of the invention to ViaSat, Inc.
☒ A ☒ signed ☐ unsigned Declaration & Power of Attorney
☐ A ☐ signed ☐ unsigned Declaration
☐ A Power of Attorney by Assignee with Certificate Under 37 CFR Section 3.73(b).
☒ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27 ☒ is enclosed ☐ was filed in the prior application and small entity status is still proper and desired
☐ A certified copy of a _____ application.
☒ Information Disclosure Statement under 37 CFR 1.97, Form PTO-1449, and seven references
☐ A petition to extend time to respond in the parent application
☒ Recordation Cover Sheet.

	(Col. 1)	(Col. 2)
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	74 - 20	= *54
INDEP. CLAIMS	9 - 3	= *6
[] MULTIPLE DEPENDENT CLAIM PRESENTED		

* If the difference in Col. 1 is less than 0, enter "0" in Col. 2.

SMALL ENTITY	
RATE	FEE
	\$345.00
x \$9.00 =	\$486.00
x \$39.00 =	\$234.00
+ \$130.00 =	
TOTAL	\$1,065.00

OTHER THAN SMALL ENTITY		
OR	RATE	FEE
OR		\$690.00
OR	x \$18.00 =	
OR	x \$78.00 =	
OR	+ \$260.00 =	
OR	TOTAL	

Please charge Deposit Account No. 20-1430 as follows:

- ☒ Filing fee \$ \$1,065.00
☒ Any additional fees associated with this paper or during the pendency of this application.
☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b)

- [] A check for \$_____ is enclosed.
2 extra copies of this sheet are enclosed.

Respectfully submitted,
TOWNSEND and TOWNSEND and CREW LLP

Telephone:
(650) 326-2400

Facsimile:
(650) 326-2422

George B. F. Yee
Reg No.: 37,478
Attorneys for Applicants

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(c)) - SMALL BUSINESS CONCERN

Applicant or Patentee: Mark J. Miller et al.
 Application or Patent No.: _____
 Filed or Issued: _____
 Title: METHOD AND APPARATUS FOR MULTIPLE ACCESS OVER A COMMUNICATION CHANNEL

I hereby declare that I am:

- ☐ the owner of the small business concern identified below:
☒ an official of the small business concern empowered to act on behalf of the concern identified below.

Name of Small Business Concern: ViaSat, Inc
 Address of Small Business Concern: 6155 El Camino Real
Carlsbad, CA 92009

I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled ADAPTIVE DATA RATE CONTROL FOR NARROWCAST NETWORKS by inventor(s) described in:

- ☒ the specification filed herewith;
☐ Application No. _____, filed _____;
☐ Patent No. _____, issued _____

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights in the invention is listed below* and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern that would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e)

*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)


Name: _____
 Address: _____
☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

Name: _____
 Address: _____
☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Name of Person Signing: Gregory D. Monahan
 Title of Person if Other than Owner: Vice President, Administration & General Counsel
 Address of Person Signing: 6155 El Camino Real
Carlsbad, CA 92009

Signature 

Date March 15, 2000

PATENT APPLICATION
METHOD AND APPARATUS FOR MULTIPLE ACCESS OVER A
COMMUNICATION CHANNEL

Inventor(s):

Mark J. Miller, a citizen of the United States of America, residing at,
508 Latigo Row
Encinitas, CA 92024

Mark D. Dankberg, a citizen of the United States of America, residing at,
1239 Crest Drive
Encinitas, CA 92024

Charles N. Pateros, a citizen of the United States of America, residing at,
4150 Adams Street
Carlsbad, CA 92008

Assignee:

ViaSat, Inc.
6155 El Camino Real
Carlsbad, CA 92009
(a California corporation)

Entity: Small business concern

METHOD AND APPARATUS FOR MULTIPLE ACCESS OVER A COMMUNICATION CHANNEL

CROSS-REFERENCES TO RELATED APPLICATIONS

5 This application claims the benefit of U.S. Provisional Application No. 60/148,925 (attorney docket no. 017018-12.0US), filed August 13, 1999, and is herein incorporated by reference.

BACKGROUND OF THE INVENTION

10 The present invention relates generally to communication techniques and in particular to a spread spectrum communication technique.

 A spread spectrum communication system is a system in which the transmitted signal is "spread" over a wide range of frequencies. Typically the bandwidth is much wider than the minimum bandwidth needed to transmit the information being
15 sent. The underlying premise of this technique is that, in channels (typically wireless) with narrowband noise, an increase in the transmitted signal bandwidth produces a corresponding increase in the probability that the received information will be correct.

 Though inefficient in its use of bandwidth, an advantage of spread spectrum is its resistance to interference. Another advantage is that the technique can be
20 combined with existing systems having narrower operating bandwidths that fall within the spread spectrum bandwidth. The presence of a spread spectrum signal only slightly increases the noise floor that the narrow band receivers see.

 Various spread spectrum techniques are known: In a frequency hopping system, the carrier frequency of the transmitter changes from among a pre-selected set of
25 carrier frequencies in accordance with a pseudo-random code sequence. The frequencies selected from the list are dictated by the codes in the sequence. In a time hopping system, the period and duty cycle of the pulsed radio frequency ("RF") carrier are varied in a pseudo-random manner in accordance with the pseudo-random code sequence. In a pulsed frequency modulated ("FM") system, the RF carrier is modulated with a fixed
30 period and fixed duty cycle sequence. During the transmission of each pulse, the carrier frequency is frequency modulated. Hybrid systems incorporate aspects of two or more other systems.

Direct sequence ("DS") spread spectrum is a well known technique for transmitting digital data. The name *direct sequence* derives from the fact that the data sequence is directly multiplied by a high rate spreading sequence before it is transmitted over the channel. The spreading sequence is a sequence that transitions much faster than the data sequence. Instead of being called bits as in the data sequence, the individual states of the spreading sequence are called *chips*. The ratio of the chip rate to the data rate is commonly known as the spreading gain (or *processing gain*), since it is the ratio by which the bandwidth of the data sequence is increased once it is multiplied by the spreading sequence.

Refer to Fig. 1 for an illustration of the operation of direct sequence signaling. The figure shows a time domain representation of a case in which the chip rate of spreading sequence signal C is four times the rate of the data sequence D; i.e.

$$\frac{1}{t_c} = 4 \times \frac{1}{t_d}$$

The resulting spread signal S is the product of the two sequences. When the data bit in D is in a first logic state, signal S follows the spreading sequence C and when the data bit in D is in second logic state, signal S is the complement of C. The spreading sequence signal shown in Fig. 1 does not repeat. In practice though, many conventional direct sequence spread spectrum techniques employ a spreading code that repeats once per data bit. Code representation 100 is the notational convention used in the disclosure of the present invention to represent a spreading sequence in explaining the operation of the invention. The top half of representation 100 contains an identifier for the code, in this case "Code C." The bottom half of representation 100 indicates the various chips in the spreading sequence and identifies them by number.

These spreading sequences are generally referred to as *codes*, as in Code Division Multiple Access ("CDMA"). CDMA generally refers to a technique by which users are allocated different spreading codes to enable them to use the same channel without interfering with each other. Another technique, dubbed Spread ALOHA CDMA ("SA/CDMA"), uses a single maximal length code (or a small number of maximal length codes for different service classes) that repeats once per data symbol and relies on arrival time to separate the different incoming signals. A maximal length code is a code of length $2^M - 1$, where M is an integer, and which has certain desirable autocorrelation properties. For more information on maximal length codes, refer to Pateros, Charles N., "An Adaptive Correlator Receiver for Spread Spectrum Communication," Ph. D. Thesis, Rensselaer Polytechnic Institute, Troy, N.Y., 1993.

Various code spreading strategies are known: In U.S. Pat. No. 5,084,900 to Taylor, the technique described uses a slotted Aloha CDMA system, where each packet uses the same code for the first transmission. When a collision occurs on the first packet, the packet is retransmitted using randomly selected codes from a known pool of codes.

- 5 No particular code type or relationship of code length to symbol interval is specified.

In U.S. Pat. No. 5,450,395, Hostetter et al. describe a single code system where data bit length codes are used and each user always transmits a data 'one'. The data is encoded in the time position of each broadcast. The technique requires accurate time synchronization among all of the users.

- 10 In U.S. Pat. No. 5,537,397, Abramson describes a spread ALOHA CDMA technique in which multiple users employ the same spreading code. The code is a maximal length code that repeats once per symbol. The users are time aligned at the chip level, but asynchronous at the data bit level. A subtractive multi-user receiver for this application is also described. In U.S. Pat. No. 5,745,485, Abramson extends his '397
- 15 patent to allow multiple codes to support different traffic types on the same channel.

Dankberg, et al. describe, in U.S. Pat. No. 5,596,439, a technique for self-interference cancellation for a relay channel. The technique is referred to as Paired Carrier Multiple Access ("PCMA"), since it allows a pair of channels (one in each direction) to share the same relay channel.

- 20 In U.S. Pat. No. 5,761,196, Ayerst, et al. describe a CDMA system employing re-use of spreading sequences. A central controller distributes seeds for maximal length codes as needed by users.

- An object of the invention is to provide a communication method which improves upon the prior art communication techniques. It is a further object of the
- 25 invention to further improve the multiple access collision performance of the prior art communication techniques. What is needed is a system which can realize improved performance over prior art CDMA communication systems without further complication to the system.

30 SUMMARY OF THE INVENTION

The invention is a communication technique that employs direct sequence spread spectrum signaling for the access channel. Called Code Reuse Multiple Access ("CRMA"), the method is a novel and non-obvious extension of the Code Division Multiple Access ("CDMA") and Spread ALOHA CDMA ("SA/CDMA") multiple access

techniques. The invention realizes an improvement in collision performance as compared to conventional multi-access techniques.

In accordance with the invention, a small number of spreading codes relative to the number of simultaneous transmitters are provided. In one embodiment, only a single spreading code is used. In one embodiment, the length of the spreading code is longer than the length of a data symbol. In another embodiment, the length of the spreading code is such that the code does not repeat during modulation of the data sequence. To minimize the acquisition implementation complexity of the system, shortened codes are used in the preamble portion of a data burst. In one embodiment, the preamble is spread by using a code that repeats one or more times.

Further in accordance with the invention, the coding technique can be combined with a Paired Carrier Multiple Access ("PCMA") system. This combination provides a reverse channel without having to allocate an additional operating frequency range or having to provide a separate link.

Still further in accordance with the invention, a multi-user receiver structure efficiently processes a multitude of received signals by centralizing the header acquisition process. A header acquisition component tuned to a spreading code acquires received data bursts. A pool of demodulation components is provided. An individual user data transmission is then fed to a selected one of the demodulation components to process the data portion of the received data burst.

The present invention presents many advantages over prior art systems. The invention exhibits improved multiple access collision performance as compared to SA/CDMA systems. The improved performance is achieved without adding to the complexity of standard CDMA systems. Moreover, the invention further reduces system complexity by eliminating some of the limitations of SA/CDMA, since the spreading codes of the present invention are not required to be maximal length codes of data symbol length.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram demonstrating the operation of direct sequence spread spectrum signaling.

Fig. 2a is a diagram illustrating the code reuse multiple access ("CRMA") channel.

Fig. 2b is an alternate embodiment illustrating the CRMA technique in conjunction with a paired channel multiple access ("PCMA") system.

Fig. 3 is a diagram illustrating the operation of a standard multiple access channel.

5 Fig. 4 is a diagram illustrating the operation of a Spread ALOHA/Code Division Multiple Access ("SA/CDMA") channel.

Fig. 5 is a diagram illustrating the operation of a CRMA channel according to the invention.

Fig. 6 is a diagram detailing a collision event in a SA/CDMA channel.

10 Fig. 7 is a diagram detailing the collision avoidance properties of CRMA.

Fig. 8 is a diagram illustrating a spreading code that does not repeat during the burst preamble.

Fig. 9 is a diagram illustrating the process of splitting a preamble spreading code into two shorter codes that repeat during the burst preamble.

15 Fig. 10 is a diagram illustrating the process of splitting a preamble code into four shorter codes that repeat during the preamble.

Fig. 11 is a schematic representation of a multi-user receiver in accordance with the present invention.

20 Fig. 12 is a schematic representation showing the basic components of a transmitting station in accordance with the invention.

DESCRIPTION OF THE SPECIFIC EMBODIMENTS

Fig. 2a shows a typical environment in which the present invention operates. As shown in the figure, a large number of users 1, 2, ... N broadcast to a common multi-user receiver 200. The receiver demodulates all of the signals $S_1, S_2, \dots S_N$ received on the single multiple access channel 210, it being understood that each signal S_x occupies the same frequency range as the other signals. A property of this environment is that there is no synchronized coordination among the users and no time synchronization between each user 1, 2 ... N and the receiver 200. Each user transmits independently of the other and asynchronously, in bursts based on its offered traffic. Consequently, there will be inevitable periods of time when two or more users are transmitting their signals to the receiver 200 simultaneously.

Refer now to the traffic model of Fig. 3 which illustrates a typical pattern of transmission activity on a standard multiple access channel. The signals from the

various users are active when that user is transmitting data. In the figure, User 2 is the first to transmit a burst 302. User 1 then transmits a burst 304 during the last half of the transmission of User 2's burst 302, and so on. In a standard channel, there is no way to separate the transmissions at the receiver, so any transmissions that overlap in time will be lost. The scenario depicted in Fig. 3 shows an especially congested traffic pattern. Bursts 302 and 304 overlap and so receiver 200 will not be able to separate the overlapping transmissions. Burst 306 overlaps initially with burst 308 from User 1 and then with burst 310 from User 2. The occurrence of two or more transmissions arriving such that they cannot be resolved is referred to as a "multiple access collision," or simply collision. In the scenario shown in Fig. 3, only the single transmission 320 received during the time period t_3 is received free of interference; it is the only transmission that is received successfully.

In Code Division Multiple Access ("CDMA"), each user is provided with a unique spreading code so that the bursts from different users can be more easily resolved. This requires a large number of codes. More significantly, the technique requires that each user have a corresponding receiver at the base station tied to that spreading sequence. This translates to a base station that is complex and costly to implement and maintain, since each user-assigned spreading code must have its own dedicated receiver hardware/firmware at the base station.

As discussed in U.S. Pat. No. 5,537,397 ("SA/CDMA"), the multiple access capability of a spread spectrum channel is not derived by the use of different spreading codes by each transmitter, but by the nature of the direct sequence spread spectrum signal itself. For minimum complexity, therefore, a single code system is ideal. U.S. Pat. No. 5,745,485 argues that different codes for different traffic types may be worth the extra complexity in the receiver in order to simplify the total system complexity. It should be noted here that the SA/CDMA systems as described in the referenced patents all use spreading sequences that have a period equal to the symbol period of the transmitted data. That is, the spreading sequence repeats in the same amount of time spanned by a data bit. As well, SA/CDMA utilizes maximal length spreading sequences, which have desirable properties, but are not required for multiple access.

Consider the prior art techniques wherein the spreading code repeats once per data symbol. Each time the code repeats, there is a potential collision with another user who starts transmitting within one chip period of this time. A collision, therefore, is

the event when two transmitters use the same spreading sequence and each begins transmitting its data burst within a time span of 1 chip period of the other. The resulting interference of the collision makes both signals unusable to the receiver, so the data sent by both transmitters is lost. As U.S. Pat. No. 5,537,397 shows, the throughput of such a system is a function of the spreading gain, the number of spreading sequence chips per data symbol.

For the purpose of the invention, a unique notation was developed to facilitate the explanation and understanding of the features of the invention. Referring to Fig. 4, for example, each data burst is represented by a series of vertical lines. Each vertical line represents the beginning of the spreading code as it is being applied to (modulated onto) the data sequence comprising the data burst. Hence, each vertical line represents the modulation of one or more data symbols (data bits, where the transmitted information is binary data) by the spreading code. The number of data symbols modulated depends on the bit rate, the chip rate, and the number of chips comprising the spreading code. For example, given a symbol (bit) rate of five symbols (bits) per second and a 200-chip spreading sequence at a chip rate of 40 chips per second, 25 symbols (bits) are modulated in one cycle of the spreading sequence. Thus for a 100 symbol data sequence, the spreading sequence will repeat four times during modulation of the data sequence; the data sequence spans a total time of 20 seconds and the spreading sequence spans a time period of five seconds.

Refer again to the traffic model shown Fig. 3 and to the diagrams of Figs. 4 and 6. As mentioned before, multiple access collisions can occur every time the spreading sequence repeats. Fig. 4 shows the traffic pattern depicted in Fig. 3 in an SA/CDMA channel, illustrating the operation of collision avoidance. Recall that under SA/CDMA, the spreading code repeats at a rate equal to the data rate, i.e., the code repeats for every data bit..

Consider the traffic pattern of Fig. 3. At time t_x a data burst from user N (signal S_{N-A}) is transmitted. At time t_{x+1} , a data burst from user 2 (signal S_{2-A}) is transmitted. A collision between signal S_{2-A} and signal S_{N-A} occurs, since their spreading codes align within one chip interval at the time indicated by 402.

The reason for the occurrence of this collision is explained with reference to Fig. 6. Code A is used for the multiple access on the channel. User 2-A, transmitting signal S_{2-A} , begins his broadcast at the time indicated by 402. This occurs one data bit after User N-A, who broadcasts signal S_{N-A} . The first chip of the respective spreading

codes align. Consequently, both transmissions are lost during the overlap because they cannot be resolved by the receiver into separate transmissions.

Our invention is the discovery that the multiple access contention performance of the system can be improved by allowing the spreading code sequence length to be longer than the data symbol length. In one embodiment, the spreading code sequence is longer than the length (i.e., number of bits) of the data sequence to be transmitted in a single data burst. It was discovered that the number of potential collisions decreases dramatically by the technique. In addition, the complexity needed to provide for chip and bit timing coordination is removed. Another advantage of the invention is that different users can transmit with different data rates simultaneously.

This collision reduction property is clearly demonstrated in Fig. 5 using the unique notational convention described above. Fig. 5 is also based on the traffic model of Fig. 3. According to one embodiment of the invention, a long code is used which does not repeat during the length of the data bursts. Consequently, each burst in Fig. 5 is represented by only one line. There is only one possible collision event per burst, greatly decreasing the collision probability. As can be seen in Fig. 5, for the traffic pattern of Fig. 3 no collisions occur.

Referring to Fig. 7, the figure details the same event that caused a collision for the SA/CDMA system in Fig. 6. Code B, which does not repeat during the length of the burst, is used for multiple access in this CRMA channel. Here, at the time indicated by reference numeral 703, the two broadcasts S_{2-B} and S_{N-B} are separated by exactly one data bit time, as in Fig. 6. However, since Code B does not repeat for the duration of the data burst, there is no collision.

In accordance with an embodiment of the invention, the *length* of the spreading code is longer than the *length* of a data symbol. *Length* refers to a span of time. Hence, the length of the spreading code refers to the length of time spanned by the code. For a spreading code, this depends on the number of chips in the code and the chip rate of the code. Similarly, the length of a data symbol is simply the inverse of the data rate. For example, a 10 bits/second data rate translates to a data symbol whose time length is 100 milliseconds. In addition, as will be discussed shortly, one can speak of the length of a spreading code in terms of its spreading gain g which is the ratio of the chip rate to the data rate.

In an embodiment of the invention, spreading codes are selected that are much longer than a data symbol. Thus, the spreading code can have a length that exceeds

the length of the longest data sequence. For example, a data sequence of 100 bits at 10 bits/second data rate would have a length of 10 seconds. In accordance with an embodiment of the invention, the spreading code would span period of time greater than 10 seconds long. Expressed in terms of spreading gain g , a spreading code having a 10 second period would comprise $(100 \times g)$ chips. In this case, there would be only one possible contention event per burst. Only if two transmitters started their bursts within one chip time of each other would a contention collision occur. Note that the collision probability is only a function of the chip period (not the spreading gain) and the burst transmission rate.

10 Generation of long spreading codes is a straightforward process. Well understood pseudo-random number generation techniques are known for producing spreading sequences (codes). Similarly, it is a simple matter to provide logic which breaks up the long spreading codes into segments of lengths appropriate for the modulation of a data sequence in preparation for transmission, and for the subsequent
15 demodulation of a received data burst.

 It is noted the invention is advantageous in that a transmitter can receive data for transmission at a rate different from another transmitter. Consequently, the spreading gain of one transmitter can be different from the spreading gain of another transmitter.

20 Referring for a moment to Fig. 12, an embodiment of a transmitter according to the invention includes a data source to provide data sequences for transmission. The data sequence feeds into a combining component 1202 which produces the spread sequence for transmission. The combining component preferably includes a digital signal processor ("DSP") 1212 in communication with a memory 1214. DSP
25 firmware is provided to perform the spreading operations. Among other things, memory 1214 contains the spreading code(s) to be combined with an incoming data sequence by DSP 1212. As will be explained further below, memory 1214 also contains the spreading code(s) used to spread the data preamble for the preamble portion of transmitted data burst. Combining component 1202 feeds the spread signal to a conventional transmission
30 component 1204 for subsequent transmission.

 An impact that must be considered are the ramifications of using the long code scheme of the present invention in connection with the burst acquisition complexity. At the beginning of each broadcast burst, a known data preamble is transmitted to allow the receiver to acquire the transmitted signal. Typically this involves correlating the

incoming signal with a stored copy of the spread header. For the case of a spreading sequence that is only the length of the data bit, the correlator need only be as long as the data bit. For longer codes, the correlator has to be as long as the shorter of the spreading code length or the header length. Complexity in the correlator component is an issue
5 because the multiply and add operations of the correlator must run at the chip rate, rather than at the much slower data symbol rate. Once the signal is acquired, the downstream demodulation of the data portion of the data burst occurs at the data symbol rate. Hence, the data portion of a burst can be spread using much longer codes without degrading system performance during demodulation at the receiving end.

10 To address the complexity of the acquisition component, two strategies are provided in accordance with the invention. First, we can minimize the effective length of the spreading sequence in connection with the preamble portion of the data burst. Two techniques for accomplishing this are provided by the invention.

Fig. 8 illustrates the first technique. Where the spreading code, Code C, is
15 longer than the preamble, the code is truncated to a length to fit the period of time spanned by the data sequence comprising the preamble. Note that though the entire length of the spreading code may be longer than the preamble, it can be considered to be the length of the preamble for acquisition purposes. If this code requires a preamble detector that is too complex to implement, then shorter codes can be used that repeat
20 during the preamble. This is the second technique, namely, repeating segments of the spreading sequence during the preamble. It is noted that this second technique has the effect of increasing the collision probability, thus presenting a design trade-off decision to the system designer. However, another aspect of the invention permits shorter codes to be used, while keeping the collision probability the same. The discussion now turns to
25 additional embodiments of the invention.

In the embodiment shown in Fig. 9, two codes are employed, Code D and Code E. One half of the transmitters use Code D to spread its preamble data sequence and the half of the transmitters use Code E. Each code is half the length of the preamble and repeats once during modulation of the preamble. Each time the code repeats, a
30 multiple access collision can occur among the transmitters using Code D; likewise with the Code E transmitters. However, since only half of the channel users will be using either Code D or Code E, the collision probability is the same as if all users were using a single, long code. Note that all users could use the same code, Code D. This would result

in a simpler system that had a larger probability of collision compared to a system employing Code C.

To further lower the correlation overhead in the acquisition circuitry, this process is further extended in Fig. 10. Here, four codes, Code F, Code G, Code H and Code I, are utilized by four groups of transmitters. Each code repeats four times during modulation of the preamble, so the four codes are each allocated to one fourth of the users. Hence by splitting the preamble spreading code in this fashion, per the invention, the complexity in the acquisition circuitry is greatly reduced without affecting the collision performance. Here, the use of one, two or three codes would simplify the acquisition system while again increasing the collision probability compared to a system using a longer code.

It is noted here that the spreading code used for spreading the preamble data sequence can be simply a portion of the spreading code used to spread the data sequence of the data portion of the burst. More generally, the spreading code for the preamble does not have to be derived from the spreading code for the data portion. In an embodiment of the invention, more than one spreading code is used for spreading preambles, while an identical longer code is used to spread the data sequence of the data burst. In yet another embodiment of the invention, more than one spreading code is used for spreading preambles, while two or more identical longer codes are used to spread the data sequences of data bursts from multiple transmitters.

It is further noted here that the preamble is always shorter than the burst, and is often a very small fraction of the burst. Thus, the multiple access collision performance of the system may be adequate even if there is only one spreading code used for the burst preambles, and even if that code repeats many times during the preamble interval. The performance enhancement comes about by the use of the longer code used for the data portion of the data bursts.

In still yet another embodiment, one may consider the bandwidth of the single carrier multiple access channel. If the channel bandwidth far exceeds the bandwidth required of the highest spreading chip rate, then the channel may be divided into multiple narrower sub-channels. The sub-channels may be of equal or unequal bandwidth, depending on the bandwidth requirements of the different spreading codes. Thus, where lower complexity transmitters are desired, this embodiment realizes greater utilization of a given multiple access carrier channel by allowing for lower chip rates.

Fig. 11 shows a receiver 1100 configured in accordance with the invention. The receiver represents the second strategy to address the acquisition complexity issue. The embodiment of receiver 1100 shown in Fig. 11 uses a single preamble detector module (typically implemented as a correlator) that hands off the demodulation to a pool of demodulators.

Receiver 1100 includes an antenna 1102 for receiving signal. The antenna feeds the signal to an analog-to-digital (a/d) front end 1102. The a/d front end is coupled to a preamble detection component 1106. A demodulation controller component 1108 selectively activates a pool of demodulation units 1110. The demodulation units feed into a data handling system 1112.

In operation, an incoming signal is received by an antenna 1110 and is processed by a/d front end 1102. The front-end digitizes the signal to produce a stream of samples. The samples are placed on a digital sample bus 1134. The sample bus makes the samples available to preamble detection component 1106 and to the demodulation units in demodulator pool 1110.

The preamble detection component receives the sample stream, and using the same data preamble and preamble spreading code as in the transmitters, determines the timing, phase and frequency offsets of transmission preambles in the received signal. This detection data is placed on a control bus 1136.

In an alternate embodiment, transmitters are divided into two or more groups. Each group having a preamble spreading code (or codes) assigned to it where each transmitter in a group uses its assigned spreading code to spread the preamble. At the receiver end, additional preamble detectors 1120 are provided, one for each spreading code that is used. The output of a/d front end 1104 feeds into each of the additional preamble detection components 1120.

When a burst is detected by preamble detection component 1106, demodulation controller 1108 is activated by appropriate signaling over control line 1132. The demodulation controller selects an idle demodulator from pool 1110. The selected demodulator picks up the corresponding detection data from sample bus 1134 and utilizes it to process the data portion of the burst. After demodulation, the demodulator forwards the demodulated data to data handling system 1112 over signal bus 1138. Once the burst is over, the demodulator informs demodulation controller 1108. The demodulator is placed back into the pool of available demodulators 1110. The number of demodulators in pool 1110 is a function of the maximum number of simultaneous transmitters that are

allowed on the channel. This number is typically determined by the number of simultaneous transmissions that can occur on the channel without compromising the ability of the receiver to detect all the transmitters.

Referring to Fig. 2b, in another embodiment of the present invention, the inventive code reuse scheme is combined with a PCMA technique. This communication technique is explained, for example, in U.S. Pat. No. 5,596,439, which is fully incorporated herein for all purposes. In this embodiment, a base station 220 is the hub to which a number of users are connected. The forward channel is a high powered signal 222 that is broadcast from the hub to all the users 230. The reverse channel 232 (backchannel), from the users back to the hub, is a CRMA channel configured according to the present invention. By using PCMA, hub 220 can broadcast data (as well as control messages) to users 230 in the same frequency band as the multiple access reverse channels. By employing PCMA, the hub can remove its own transmitted signal from its received signal and then detect all the CRMA users accordingly as disclosed above.

The unique combination of a PCMA technique and the inventive code reuse technique permits data exchange in both directions between a base station and its associated transmitters. Conventionally, the back-channel is provided by a landline connection or by a wireless method that uses a different frequency range. An advantage of this unique combination is that the back-channel is obtained practically for free. The back-channel can contain controlling information sent to the hub. The hub can be an Internet service provider (ISP) where the downlink is the PCMA channel and user inputs are transmitted by the CRMA channel of the invention.

WHAT IS CLAIMED IS:

- 1 1. In a single data communication channel, a multiple access method
2 comprising steps of:
3 (a) receiving a data sequence to be transmitted, the data sequence
4 comprising plural data symbols;
5 (b) producing a spread signal by modulating a first spreading code onto the
6 data sequence; and
7 (c) transmitting the spread signal,
8 wherein the first spreading code spans a period of time which exceeds the
9 time span of a data symbol.
- 1 2. The method of claim 1 further including performing the steps (a)
2 through (c) for a plurality of first transmissions wherein for each of the first
3 transmissions, the step of transmitting includes providing a preamble data sequence and
4 modulating the preamble data sequence with a first preamble spreading code to produce a
5 spread preamble signal.
- 1 3. The method of claim 2 further including performing the steps (a)
2 through (c) for a plurality of second transmissions wherein for each of the second
3 transmissions, the step of transmitting includes providing a second preamble data
4 sequence and modulating the second preamble data sequence with a second preamble
5 spreading code to produce a second spread preamble signal.
- 1 4. The method of claim 1 further including providing a second
2 spreading code and performing the steps (a) through (c) for a plurality of transmissions,
3 wherein some of the transmissions use the first spreading code and others of the
4 transmissions use the second spreading code.
- 1 5. The method of claim 1 further including performing the steps (a)
2 through (c) for a plurality of transmissions wherein for some of the transmissions a first
3 spreading gain is used and for others of the transmissions a second spreading gain is used.
- 1 6. The method of claim 1 further including dividing the single
2 communication channel into plural sub-channels and performing steps (a) through (c) for
3 each sub-channel.

1 7. The method of claim 1 further including performing the steps (a)
2 through (c) for a plurality of transmissions wherein for some of the transmissions the data
3 sequence is received at a first data rate and for others of the transmissions the data
4 sequence is received at a second data rate.

1 8. The method of claim 1 further including receiving transmissions
2 from a base station that uses paired carrier multiple access signaling.

1 9. In a single communication channel, a multiple access method
2 comprising:
3 providing a first spreading code;
4 receiving plural data sequences for transmission;
5 for at least one of the data sequences, generating a spread signal by
6 modulating the data sequence with the first spreading code and transmitting the spread
7 signal over the single communication channel,
8 wherein the first spreading code spans a period of time which exceeds the
9 time span of a data symbol.

1 10. The method of claim 9 wherein the data sequences originate from
2 different users.

1 11. The method of claim 9 wherein the step of transmitting includes
2 providing plural preamble data sequences and modulating one or more of the preamble
3 data sequences with a first preamble spreading code to produce plural spread preamble
4 signals.

1 12. The method of claim 11 further including modulating one or more
2 of the preamble data sequences with a second preamble spreading code.

1 13. The method of claim 12 wherein the step of modulating includes
2 repeating the first preamble spreading code one or more times.

1 14. The method of claim 9 further including providing a second
2 spreading code and, for at least one of the data sequences, generating a second spread
3 signal by modulating the data sequence with the second spreading code and transmitting
4 the second spread signal.

1 15. The method of claim 14 wherein the first spreading code has a first
2 spreading gain and the second spreading code has a second spreading gain.

1 16. The method of claim 14 further including dividing the single
2 communication channel into at least first and second sub-channels and transmitting the
3 first spread signal over the first sub-channel and the second spread signal over the second
4 sub-channel.

1 17. The method of claim 9 wherein the step of receiving plural data
2 sequences includes receiving first data sequences having a first data rate and receiving
3 second data sequences having a second data rate.

1 18. The method of claim 9 further including receiving transmissions
2 from a base station that uses paired carrier multiple access signaling.

1 19. In a single data communication channel, a method for providing
2 multiple access to the channel comprising:
3 providing plural transmitters;
4 providing an identical first spreading code in each of the transmitters; and
5 in each transmitter: receiving a data sequence, spreading the data sequence
6 using the first spreading code to produce a spread signal, and transmitting the spread
7 signal,

8 wherein the first spreading code spans a period of time which exceeds the
9 time span of a data symbol.

1 20. The method of claim 19 wherein the step of transmitting includes:
2 providing a preamble data sequence; modulating the preamble data sequence with a first
3 preamble spreading code in some of the transmitters to produce a spread preamble signal;
4 and transmitting the spread preamble signal.

1 21. The method of claim 20 wherein the step of modulating the
2 preamble data sequence in others of the transmitters uses a second preamble spreading
3 code.

1 22. The method 19 further including:
2 providing plural additional transmitters;

3 providing an identical second spreading code in each of the additional
4 transmitters; and
5 in each of the additional transmitters: receiving a data sequence, spreading
6 the data sequence using the second spreading code to produce a spread signal, and
7 transmitting the spread signal.

1 23. The method of claim 22 wherein the first spreading code has a first
2 spreading gain and the second spreading code has a second spreading gain.

1 24. The method of claim 19 wherein the step of receiving a data
2 sequence in one of the transmitters includes receiving the data sequence at a first data
3 rate, and the step of receiving a data sequence in another of the transmitters includes
4 receiving the data sequence at a second data rate.

1 25. The method 19 further including:
2 dividing the single communication channel into at least two sub-channels;
3 providing plural additional transmitters;
4 providing an identical second spreading code in each of the additional
5 transmitters; and
6 in each of the additional transmitters: receiving a data sequence, spreading
7 the data sequence using the second spreading code to produce a spread signal, and
8 transmitting the spread signal over one of the sub-channels.

1 26. The method of claim 19 further including receiving transmissions
2 from a base station that uses paired carrier multiple access signaling.

1 27. In a single data communication channel, a multiple access method
2 comprising steps of:
3 (a) receiving a data sequence to be transmitted, the data sequence
4 comprising plural data symbols;
5 (b) producing a spread signal by modulating a first spreading code onto the
6 data sequence; and
7 (c) transmitting the spread signal,
8 wherein the first spreading code does not repeat during the step of
9 modulating the data sequence.

1 28. The method of claim 27 wherein the data sequence spans a period
2 of time that does not exceed a value T and the first spreading code spans a period of time
3 exceeding T.

1 29. The method of claim 27 further including performing the steps (a)
2 through (c) for a plurality of first transmissions wherein for each of the first
3 transmissions, the step of transmitting includes providing a preamble data sequence and
4 modulating the preamble data sequence with a first preamble spreading code to produce a
5 spread preamble signal.

1 30. The method of claim 29 further including performing the steps (a)
2 through (c) for a plurality of second transmissions wherein for each of the second
3 transmissions, the step of transmitting includes providing a second preamble data
4 sequence and modulating the second preamble data sequence with a second preamble
5 spreading code to produce a second spread preamble signal.

1 31. The method of claim 27 further including providing a second
2 spreading code and performing the steps (a) through (c) for a plurality of transmissions,
3 wherein some of the transmissions use the first spreading code and others of the
4 transmissions use the second spreading code.

1 32. The method of claim 27 further including performing the steps (a)
2 through (c) for a plurality of transmissions wherein for some of the transmissions a first
3 spreading gain is used and for others of the transmissions a second spreading gain is used.

1 33. The method of claim 27 further including dividing the single
2 communication channel into plural sub-channels and performing steps (a) through (c) for
3 each sub-channel.

1 34. The method of claim 27 further including performing the steps (a)
2 through (c) for a plurality of transmissions wherein for some of the transmissions the data
3 sequence is received at a first data rate and for others of the transmissions the data
4 sequence is received at a second data rate.

1 35. The method of claim 27 further including receiving transmissions
2 from a base station that uses paired carrier multiple access signaling.

1 36. In a single communication channel, a multiple access method
2 comprising:
3 providing a first spreading code;
4 receiving plural data sequences for transmission;
5 producing plural spread signals by modulating some of the data sequences
6 with the first spreading code, wherein the spreading code does not repeat during the step
7 of modulating; and
8 transmitting the spread signals over the single communication channel.

1 37. The method of claim 36 wherein the data sequences originate from
2 different users.

1 38. The method of claim 36 wherein each data sequence comprises at
2 most N bits and wherein the first spreading code comprises at least $N \times g$ chips, where g
3 is process gain.

1 39. The method of claim 36 wherein the step of transmitting includes
2 providing plural preamble data sequences and modulating one or more of the preamble
3 data sequences with a first preamble spreading code to produce plural spread preamble
4 signals.

1 40. The method of claim 39 further including modulating one or more
2 of the preamble data sequences with a second preamble spreading code.

1 41. The method of claim 40 wherein the step of modulating includes
2 repeating the first preamble spreading code one or more times.

1 42. The method of claim 36 further including providing a second
2 spreading code, wherein the step of producing plural spread signals includes modulating
3 some of the data sequences with the second spreading code.

1 43. The method of claim 42 wherein the first spreading code has a first
2 spreading gain and the second spreading code has a second spreading gain.

1 44. The method of claim 42 further including dividing the single
2 communication channel into at least first and second sub-channels, and transmitting the

3 first spread signal over the first sub-channel and the second spread signal over the second
4 sub-channel.

1 45. The method of claim 36 wherein the step of receiving plural data
2 sequences includes receiving first data sequences having a first data rate and receiving
3 second data sequences having a second data rate.

1 46. The method of claim 36 further including receiving transmissions
2 from a base station that uses paired carrier multiple access signaling.

1 47. In a single data communication channel, a method for providing
2 multiple access to the channel comprising:
3 providing plural transmitters;
4 providing an identical first spreading code in each of the transmitters; and
5 in each transmitter: receiving a data sequence, spreading the data sequence
6 using the first spreading code to produce a spread signal wherein the spreading sequence
7 does not repeat;
8 and transmitting the spread signal.

1 48. The method of claim 47 wherein the first spreading code spans a
2 period of time which exceeds the time span of the longest data sequence in any of the
3 transmitters.

1 49. The method of claim 47 wherein the step of transmitting includes:
2 providing a preamble data sequence; modulating the preamble data sequence with a first
3 preamble spreading code in at least some of the transmitters to produce a spread preamble
4 signal; and transmitting the spread preamble signal.

1 50. The method of claim 49 wherein the step of modulating the
2 preamble data sequence in some of the transmitters uses a second preamble spreading
3 code.

1 51. The method 47 further including:
2 providing plural additional transmitters;
3 providing an identical second spreading code in each of the additional
4 transmitters; and

5 in each of the additional transmitters: receiving a data sequence, spreading
6 the data sequence using the second spreading code to produce a spread signal, and
7 transmitting the spread signal.

1 52. The method of claim 51 wherein the first spreading code has a first
2 spreading gain and the second spreading code has a second spreading gain.

1 53. The method of claim 47 wherein the step of receiving a data
2 sequence in one of the transmitters includes receiving the data sequence at a first data
3 rate, and the step of receiving a data sequence in another of the transmitters includes
4 receiving the data sequence at a second data rate.

1 54. The method 47 further including:
2 dividing the single communication channel into at least two sub-channels;
3 providing plural additional transmitters;
4 providing an identical second spreading code in each of the additional
5 transmitters; and
6 in each of the additional transmitters: receiving a data sequence, spreading
7 the data sequence using the second spreading code to produce a spread signal, and
8 transmitting the spread signal over one of the sub-channels.

1 55. The method of claim 47 further including receiving transmissions
2 from a base station that uses paired carrier multiple access signaling.

1 56. In a system for providing multiple access over a single
2 communication channel, a transmitter comprising:
3 an input component configured to receive plural data sequences;
4 a memory store configured to contain a first spreading code, wherein the
5 first spreading code comprises more than g chips, where g is the processing gain;
6 a processing component in data communication with the memory store and
7 configured to modulate the data sequence with the first spreading code to produce a
8 spread signal; and
9 a transmission component configured to transmit the spread signal as a
10 data burst.

- 1 57. The transmitter of claim 56 wherein the data sequences each
2 comprise at most N bits and the first spreading code comprises more than $N \times g$ chips.
- 1 58. The transmitter of claim 56 wherein the memory component is
2 further configured to contain a data preamble and a preamble spreading code and the
3 processing component is further configured to modulate the data preamble with the
4 preamble spreading code.
- 1 59. The transmitter of claim 58 wherein the processing component is
2 further configured to modulate the data preamble with the preamble spreading code by
3 repeating the preamble spreading code one or more times.
- 1 60. The transmitter of claim 56 wherein the memory store is further
2 configured to contain a second spreading code and the processing component is further
3 configured to modulate the data sequences with either the first or the second spreading
4 code.
- 1 61. The transmitter of claim 60 wherein the first and second spreading
2 codes each spans a period of time greater than the time span of the longest data sequence.
- 1 62. The transmitter of claim 60 wherein the first and second spreading
2 codes have different spreading gains.
- 1 63. The transmitter of claim 56 wherein some data sequences are
2 received at a first data rate and other data sequences are received at a second data rate.
- 1 64. The transmitter of claim 56 further including a receiver component
2 for receiving signals transmitted by paired carrier multiple access signaling.
- 1 65. A system for providing multiple access over a single
2 communication channel, comprising:
3 a base station; and
4 plural transmitters, each configured to transmit data bursts to the base
5 station in an asynchronous manner,
6 each transmitter further configured to:
7 (i) receive a data sequence of at most N bits in length;

- 8 (ii) contain a spreading code, the spreading code comprising more
9 than g chips, where g is the processing gain;
10 (iii) modulate the data sequence with the spreading code to produce
11 a spread signal; and
12 (iv) transmit the spread signal as a data burst.

1 66. The system of claim 65 wherein the spreading code comprises
2 more than $N \times g$ chips.

1 67. The system of claim 65 wherein each transmitter is further
2 configured to contain a data preamble and a preamble spreading code and further
3 configured to modulate the data preamble with the preamble spreading code.

1 68. The system of claim 67 wherein each transmitter is further
2 configured to modulate the data preamble with the preamble spreading code by repeating
3 the preamble spreading code one or more times.

1 69. The system of claim 65 wherein each transmitter is further
2 configured to receive the data sequence at a first data rate, the system further including
3 plural additional transmitters, wherein each additional transmitter is configured to receive
4 data sequences at a second data rate different from the first data rate.

1 70. The system of claim 69 wherein the transmitters and the base
2 station are not configured to perform chip alignment or bit alignment.

1 71. The system of claim 65 wherein the base station is not configured
2 with a multi-user detection component.

1 72. The system of claim 65 wherein the base station transmits to the
2 transmitters using a paired carrier multiple access technique.

1 73. In a system for providing multiple access over a single
2 communication channel, a receiver comprising:
3 a digital signal representing a received data burst;
4 a data bus, the digital signal being fed to the data bus;
5 a control bus;

6 a preamble detection component coupled to the control bus, the data signal
7 further being fed to the preamble detection component, the preamble detection component
8 configured to detect preambles using a first spreading code;
9 plural demodulation circuits, each coupled to the data bus and to the
10 control bus, each configured to produce a data stream from data received over the data
11 bus; and
12 a selection component operatively coupled to the preamble detection
13 component and coupled to the control bus, the selection component configured to select
14 an available demodulation circuit,
15 wherein one of the demodulation circuits operates on data in response to
16 control signals issued by the preamble detection component and by the selection
17 component, so that multiple data bursts received by the preamble detection component
18 can be concurrently processed by selected ones of the demodulation circuits.

1 74. The receiver of claim 73 further including plural additional
2 preamble detection components, each configured to detect preambles using a spreading
3 code different from the spreading code of the other preamble detection components, each
4 coupled to receive the data signal, each coupled to the data bus, each coupled to the
5 selection component.

METHOD AND APPARATUS FOR MULTIPLE ACCESS OVER A COMMUNICATION CHANNEL

ABSTRACT OF THE DISCLOSURE

This invention is a multiple access communication technique by which a
5 multitude of transmitters communicate with receivers using direct sequence spread spectrum
signaling. The direct sequence codes are reused by a large number of simultaneous
transmitters, so the system is named Code Reuse Multiple Access ("CRMA"). This reuse
method requires only a small number of codes relative to the number of simultaneous
transmitters, and can use as few as one code for all the users. The direct sequence codes are
10 not required to have special properties such as maximal length. The lengths of the spreading
codes employed are not necessarily related to the bit or symbol interval. CRMA can be
implemented on a Paired Carrier Multiple Access ("PCMA") system with or without a novel
receiver structure which is also described.

15

PA 3053935 v2

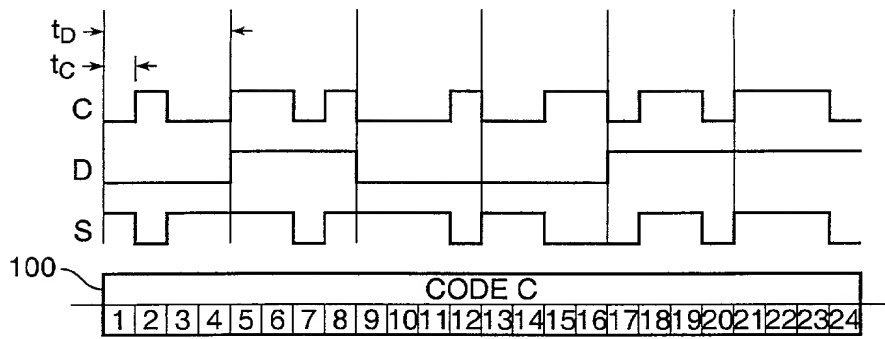


FIG. 1

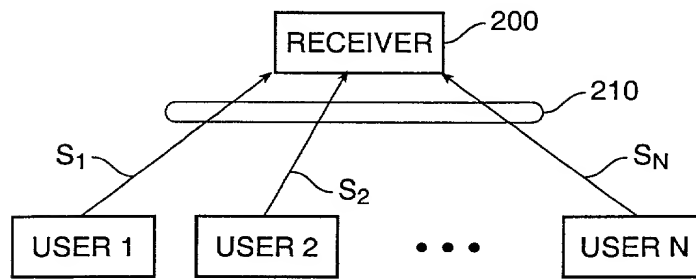


FIG. 2A

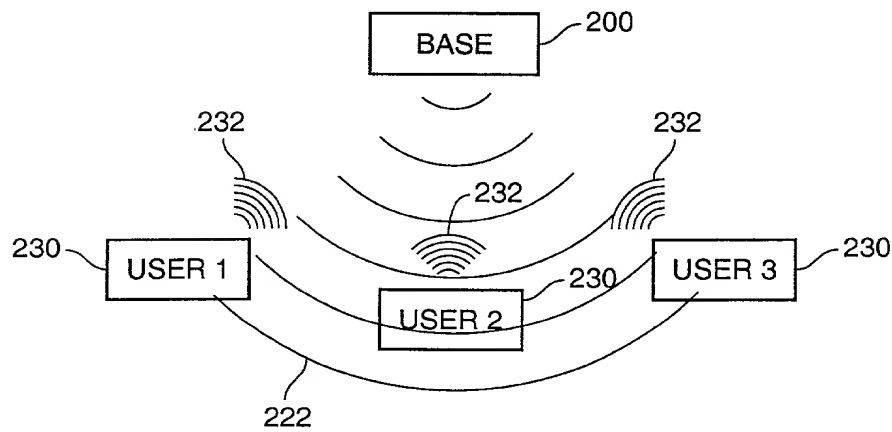


FIG. 2B

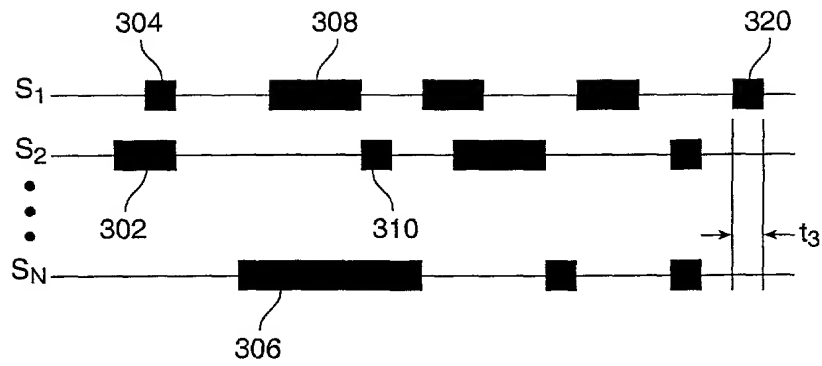


FIG. 3

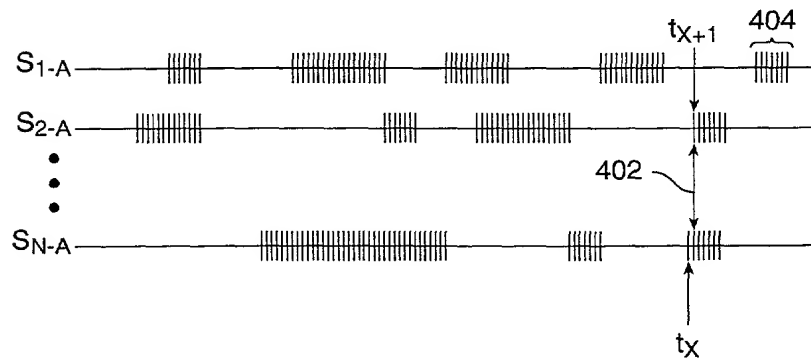


FIG. 4

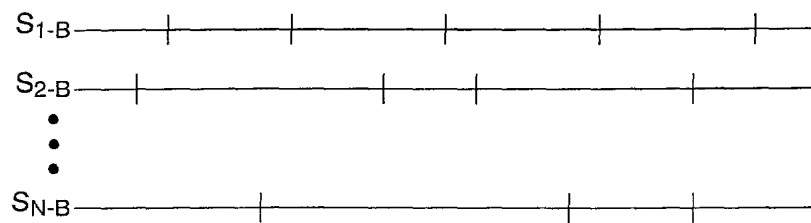


FIG. 5

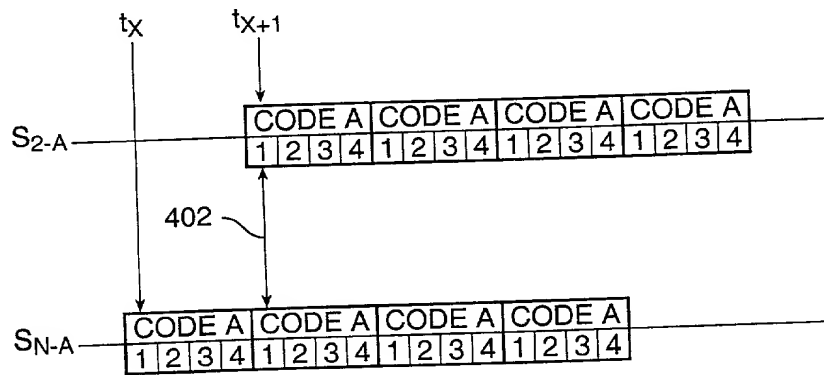


FIG. 6

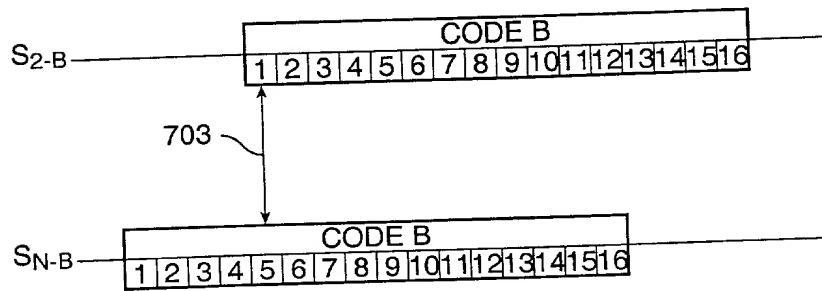


FIG. 7

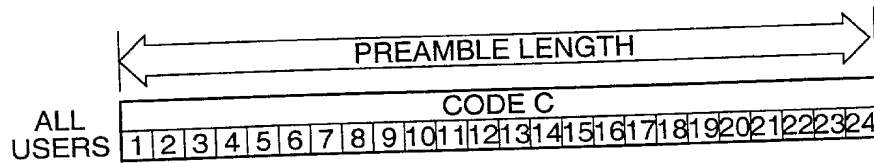


FIG. 8

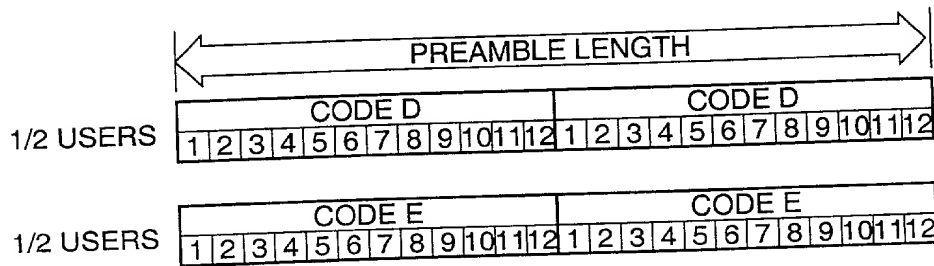


FIG. 9

4/4

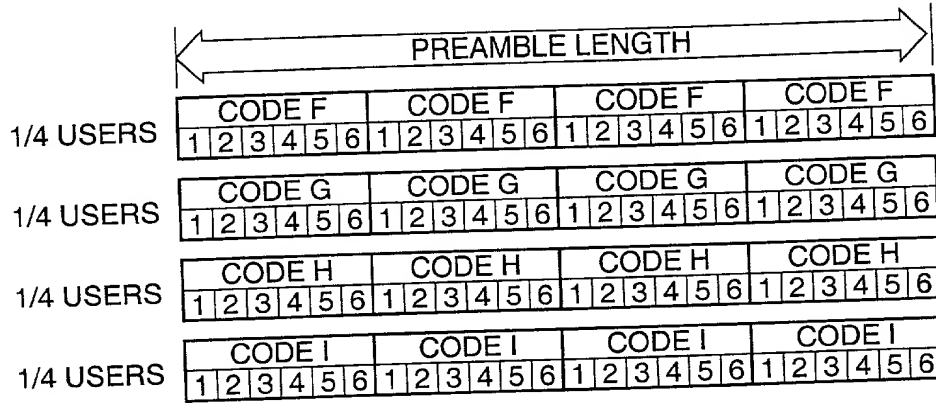


FIG. 10

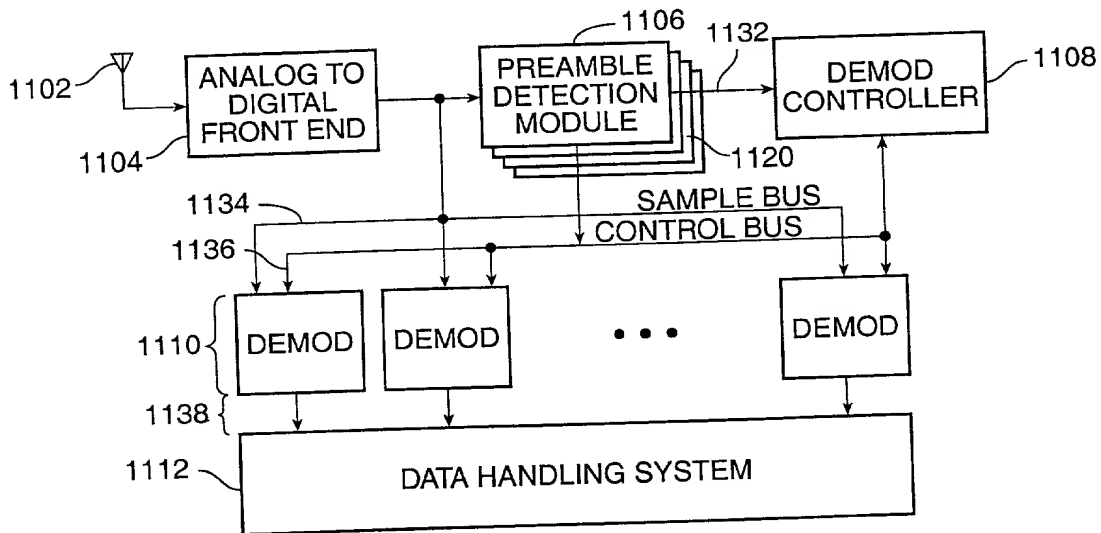


FIG. 11

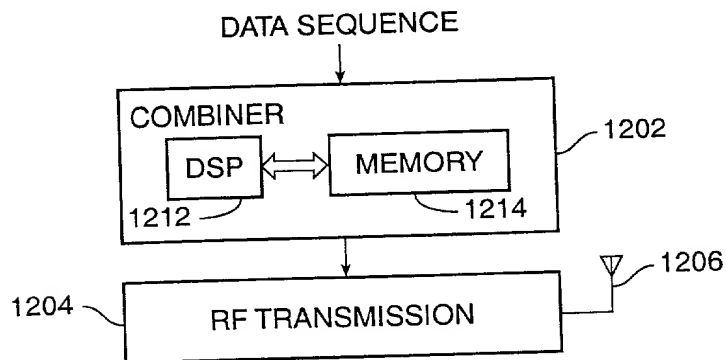


FIG. 12

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that:

My residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **METHOD AND APPARATUS FOR MULTIPLE ACCESS OVER A COMMUNICATION CHANNEL** the specification of which is attached hereto.

I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56. I claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Country	Application No.	Date of Filing	Priority Claimed Under 35 USC 119

Thereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below:

Application No.	Filing Date
60/148,925	August 13, 1999

I claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application No.	Date of Filing	Status




POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

George B. F. Yee, Reg. No. 37,478
Kenneth R. Allen, Reg. No. 27,301
Kim Kanzaki Ph.D., Reg. No. 37,642

Send Correspondence to: George B. F. Yee TOWNSEND and TOWNSEND and CREW LLP Two Embarcadero Center, 8th Floor San Francisco, California 94111-3834	Direct Telephone Calls to: (Name, Reg. No., Telephone No.) Name: George B. F. Yee Reg. No.: 37,478 Telephone: 650-326-2400
---	--

Full Name of Inventor 1:	Last Name: MILLER	First Name: MARK	Middle Name or Initial: J.	
Residence & Citizenship:	City: Encinitas	State/Foreign Country: California	Country of Citizenship: United States	
Post Office Address:	Post Office Address: 508 Latigo Row	City: Encinitas	State/Country: California	Postal Code: 92024
Full Name of Inventor 2:	Last Name: DANKBERG	First Name: MARK	Middle Name or Initial: D.	
Residence & Citizenship:	City: Encinitas	State/Foreign Country: California	Country of Citizenship: United States	
Post Office Address:	Post Office Address: 1239 Crest Drive	City: Encinitas	State/Country: California	Postal Code: 92024
Full Name of Inventor 3:	Last Name: PATEROS	First Name: CHARLES	Middle Name or Initial: N.	
Residence & Citizenship:	City: Carlsbad	State/Foreign Country: California	Country of Citizenship: United States	
Post Office Address:	Post Office Address: 4150 Adams Street	City: Carlsbad	State/Country: California	Postal Code: 92008

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signature of Inventor 1  MARK J. MILLER Date 3/16/00	Signature of Inventor 2  MARK D. DANKBERG Date 3/15/00	Signature of Inventor 3  CHARLES N. PATEROS Date 3/16/00
---	--	--